

VOLUME 25.1

VALID FEBRUARY 1ST - AUGUST 31ST, 2025





Bowers Air Gauging

A New Approach: user friendly method of providing high precision results in even the most challenging of shop-floor environments

Features:

- TFT colour touch screen display 4,3", resolution 480x272
- Static or dynamic measurements (Max, Min, Max-Min, Average, Median)
- · Analogue or digital display
- Display resolution (up to 0.1µm)
- · RS232 port for communication with a PC
- USB port for communication and/or power supply
- · Footpedal to make measurements quicker and easier





Call your E.M. Precise Rep for pricing! (905) 664-2644

Bowers Smartplug Bore Gauges

Features:

- Range 6-280mm
- Plug body coatings: Hard-chrome (standard), wear resistant coatings available on request
- Measuring contacts: Tungsten carbide, (standard), hard-chrome, ruby, ceramic
- · Tough, robust construction
- Easy-to-use
- Long life

Bowers

- Cost-effective
- High accuracy dedicated plug-gauges
- Suitable for through bores or blind bores
- · Extensions available for deeper bores
- Quick and reliable measurement
- · 2-point measurement as standard
- Blind bore available on request
- Depth-stops available
- Extensions available for deeper bores
- · Guide chamfer for easy entry into bore
- High durability, long-life plugs and contacts
- Easy to clean
- Plug body coatings: Hard-chrome (standard), T.i.N.,
 Plain steel
- Measuring contacts: Tungsten carbide, (standard), hard-chrome, ruby, ceramic















Call your E.M. Precise Rep for pricing! (905) 664-2644

Bowers XT500 Large Diameter 3-point

Bore Gauge

Features:

- · New constant-force digital readout
- Single 300mm setting ring covers full range
- · Radiussed anvils of tool-steel for optimum centering
- Accuracy: 15µm
- Repeatability: 3µm
- IP67 electronics
- · Proximity output with built-in Bluetooth
- · Resolution 0.01/0.001mm. Metric/inch switchable
- Fast accurate measurement
- · Extensions available for deeper bores
- UKAS certificate with setting ring
- Certificate of conformity with bore gauge
- · Supplied in a fitted case



| Part No. | Banga | Donth | Catting Ding | List Price | Golo Brilos |
|------------|--------------------|-------|--------------|-------------|-------------|
| Part No. | Range | Depth | Setting Ring | LIST Price | Sale Price |
| XT5001M-BT | 300-325mm | 120mm | 300mm | \$7,766.85 | \$6,990.17 |
| XT5002M-BT | 300-325, 325-350mm | 120mm | 300mm | \$8,830.93 | \$7,947.84 |
| XT5003M-BT | 300-325, 350-375mm | 120mm | 300mm | \$9,059.03 | \$8,153.13 |
| XT5004M-BT | 300-325, 375-400mm | 120mm | 300mm | \$9,234.07 | \$8,310.66 |
| XT5005M-BT | 300-325, 400-425mm | 120mm | 300mm | \$9,468.53 | \$8,521.68 |
| XT5006M-BT | 300-325, 425-450mm | 120mm | 300mm | \$9,701.93 | \$8,731.74 |
| XT5007M-BT | 300-325, 450-475mm | 120mm | 300mm | \$9,883.34 | \$8,895.01 |
| XT5008M-BT | 300-325, 475-500mm | 120mm | 300mm | \$10,053.09 | \$9,047.78 |
| | | | | | |

Bowers Universal Gauge Sets

Features:

- Internal and external measurement
- Large measuring range possible 0-3000mm (0-118")
- Constant measuring force
- Supplied with digital readout

- · Large range of accessories for standard measurement of threads, grooves, splines, diameters, lengths, shallow spigots and recess diameters etc
- Special anvil designs available P.O.A



TGUSET1



TGUSET2

TGUSET1 Contents:

- TGU1000-XT Universal with Box but without Indicator or Accessories
- TGUA001-AN Digital / Analogue Indicator 25mm / 0.001mm c/w COWL
- TGUA006 Measuring arms 50mm (Pair)
- TGUA007 Measuring Arms 75mm (Pair)
- TGUA008 Measuring Arms 100mm (Pair)
- TGUA013 20mm Disc Anvils for measuring grooves (Pair)
- TGUA014 12mm Disc Anvils Int/Ext for measuring grooves (Pair)
- TGUA011 Shoulder anvils flat outside spigot diameter (Pair)
- · TGUA012 Semi-cylindrical anvils for inside register diameters (Pair)
- TGUA010 Depth-stops (Pair)
- TGUA003 Clamping inserts (Pair)
- TGUA004 Flat Measuring Anvil (Pair)
- TGUA005 Spherical contacts (Pair)
- TGUA009 Mounting Attachment (Pair)

TGUSET2 Contents:

- TGU1000-XT Universal Gauge with box but without indicator or Accessories
- TGUA001-AN Digital / Analogue Indicator 25mm/ 0.001mm c/w COWL
- TGUA003 Clamping Insert (Pair)
- TGUA005 Spherical contacts (Pair)
- TGUA006 Measuring Arm 50mm (Pair)
- TGUA010 Depth Stop (Pair)





OOLS NORTH AMERICA

Bowers BLUETOOTH

XTH3 Bluetooth Holematic Pistol Grips





Measure cylinder bores, high accuracy bearings, grooves, threads, and much more!

Features:

- Coolant proof, dust proof IP67
- Resolution: 0.00005"/0.001mm
- · Bluetooth connectivity to your phone or tablet
- Self centering 3 point heads above 0.250"
- Tungsten carbide measuring faces on all 3-point heads from 0.5"/12.5mm and up
- Sizes over 0.500"/12.5mm feature blind bore capability
- Includes UKAS certificates for all pistol grip, heads and rings



SXTH6i-BT











Bore Gauging Systems

Special application heads operate with either style handle

Contact the Eclipse Sales Team for more information! 1-800-260-2124



















| Part No. | Range | Includes | List Price | Sale Price |
|------------------|---|----------------------------|------------|------------|
| Pistol Grip Sets | | | | |
| SXTH1i-BT | 0.080" - 0.250"/2 - 6mm (2-point heads) | 5 heads, 1 handle, 3 rings | \$7,655.45 | \$6,889.91 |
| SXTH3i-BT | 0.250" - 0.375"/6 - 10mm | 2 heads, 1 handle, 1 ring | \$2,918.54 | \$2,626.69 |
| SXTH4i-BT | 0.375" - 0.750"/10 - 20mm | 3 heads, 1 handle, 2 rings | \$3,444.74 | \$3,100.27 |
| SXTH5i-BT | 0.750" - 2" /20 - 50mm | 3 heads, 1 handle, 2 rings | \$4,438.81 | \$3,994.93 |
| SXTH6i-BT | 2" - 4"/50 - 100mm | 3 heads, 1 handle, 2 rings | \$4,965.01 | \$4,468.51 |
| SXTH7i-BT | 4" - 6"/100 - 150mm | 2 heads, 1 handle, 1 ring | \$4,438.81 | \$3,994.93 |
| SXTH8i-BT | 6" - 8" /150 - 200mm | 2 heads, 1 handle, 1 ring | \$5,959.08 | \$5,363.17 |
| SXTH9i-BT | 4" - 8" /100 - 200mm | 4 heads, 1 handle, 2 rings | \$9,526.88 | \$8,574.19 |
| SXTH11i-BT | 0.750" - 4"/20 - 100mm | 6 heads, 1 handle, 4 rings | \$7,421.00 | \$6,678.90 |
| SXTH10i-BT | 0.250" - 0.750"/6 - 20mm | 5 heads, 1 handle, 3 rings | \$4,087.65 | \$3,678.89 |
| Holemike Sets (7 | raditional style) | | | |
| SXTD1i-BT | 0.080" - 0.250"/2 - 6mm (2-point heads) | 5 heads, 1 handle, 3 rings | \$7,011.49 | \$6,310.34 |
| SXTD3i-BT | 0.250" - 0.375"/6- 10mm | 2 heads, 1 handle, 1 ring | \$2,800.78 | \$2,520.70 |
| SXTD4i-BT | 0.375" - 0.750"/10 - 20mm | 3 heads, 1 handle, 2 rings | \$3,386.39 | \$3,047.75 |
| SXTD5i-BT | 0.750" - 2" /20 - 50mm | 3 heads, 1 handle, 2 rings | \$4,672.20 | \$4,204.98 |
| SXTD6i-BT | 2" - 4"/50 - 100mm | 3 heads, 1 handle, 2 rings | \$5,140.06 | \$4,626.05 |
| SXTD7i-BT | 4" - 6"/100 - 150mm | 2 heads, 1 handle, 1 ring | \$4,322.11 | \$3,889.90 |
| SXTD8i-BT | 6" - 8" /150 - 200mm | 2 heads, 1 handle, 1 ring | \$5,784.03 | \$5,205.63 |
| SXTD9i-BT | 4" - 8" /100 - 200mm | 4 heads, 1 handle, 2 rings | \$9,234.07 | \$8,310.66 |
| Connectivity Cab | oles/Accessory | | | |
| 926.6721.10 | Proximity cable with USB connection | | \$244.90 | \$232.66 |
| 926.6723 | Proximity cable with serial connection | | \$256.27 | \$243.46 |
| 981.7100 | USB bluetooth receiver | | \$164.99 | \$156.74 |

The Baty Venture FV Series

Instant measurements at the push of a button

Highly accurate and user friendly

Ultra fast dimensional measurement

Automatic part recognition

Features:

- · Easy batch measurement
- High quality optics
- · Simultaneously measure multiple parts & measurements
- Large field-of-view
- Programmable LED ring illumination
- · Automatic programming from CAD
- · Stable and robust construction
- · Optional coax lighting
- · User friendly software
- Automatic inspection reports









| Part No. | Range | Single/Dual Field | Stage |
|----------|-----------|-------------------|-------|
| FV-1080 | 100x80mm | Single | Fixed |
| FV-2020 | 200x200mm | Dual | CNC |
| FV-3020 | 300-200mm | Dual | CNC |

Call your E.M. Precise Rep for pricing! (905) 664-2644

Baty Venture 3030 XT Multi-Sensor Vision System



Call your E.M. Precise Rep for more information! (905) 664-2644

Baty Venture Plus XT Vision System

Features:

- Teach and repeat programming
- Programmable segmented LED lighting
- High resolution 0.1µm scales for increased accuracy
- Optional CAD import / export
- Adding DXF scanning and best fitting
- · Fully dimensioned part view
- SPC included
- One click output to Excel™
- Autofocus
- · Renishaw TP20 touch probe joint
- · Integrated machine stand
- Measuring range: 640x600x250mm
- Resolution: 0.0005mm/0.00002"



Part No. VP-6460



Baty SM350 Profile Projector

Features:

- Fully usable 350mm (14") screen
- Digital screen protractor
- · Built in helix adjustment
- · Sturdy all-steel design
- Heavy duty cross roller bearings
- Quick release 'X' and 'Y' travel
- · Easy-view vertical screen
- Large stage travel 250mm (10") x 125mm (5")
- · Rotating chart clips
- Fibre optic illumination for surface measurement
- 0.5 micron resolution

Part No. SM350



Call your E.M. Precise Rep for more information! (905) 664-2644

Baty Profile Projector Retrofit

Simple, plug and play

Improve your optical comparator functionality and accuracy!

With our retrofit program you can dramatically enhance the functionality of your current optical comparator.

Advanced error mapping - increase accuracy of your comparator. Comprehensive reporting including dimensioned drawing, SPC and EXCEL™ compatible first article inspection reports.

Compatible comparator types:

- Baty
- Starrett
- Mitutoyo
- Tesa

Upgrades include:

- 22" touch screen
- Intel NUC mini PC Windows 10 OS
- Fusion FT2-E metrology software
- Optical edge sensor remove operator influence
- Fast data point acquisition
- Entire system is plug and play
- · Best fitting of profile data to imported DXF files No Overlays!



\$ 4,931.00

Baty

Baty R14 Profile Projector

Features:

- 340mm (14") screen with 90° crosslines and chart clipsProfile illumination with halogen lamp and green filter
- Surface illumination (fibre optic)
- Workstage with machined slot for holding accessories
- Digital angle measurement to 1 minute
- 0.5 micron resolution

Part No. R14FT2-E





Baty R400 Profile Projector



Features:

- 400mm (16") screen
- Optical Edge Sensor combined with Baty FUSION software makes for the most functional, user-friendly comparator on the market
- · Additional accessories available

Part No. R400FT2-E



Baty R600 Profile Projector

Features:

- 600mm (24") screen with 90° cross lines and chart clips
- Heavy duty workstage with 450mm x 200mm (18" x 8") measuring range and 2 machine slots for workpiece holders
- 4 position rotating lens turret for ease of lens changing
- Profile illumination with halogen lamp and green filter
- Screen hood and curtains for use in bright ambient light conditions
- Surface illumination (fibre optic)
- · Digital angle measurement
- 0.5 micron resolution

Part No. R600FT2-E



10

Sylvac Swiss Digital Calipers

3 styles to suit your needs.









Features:

- IP67 protected against fluid and dust
- Available with Bluetooth, proximity cable or no SPC output
- Heavy duty frame
- Extra large display
- Available with ISO Cert
- 12"/300mm is supplied without depth rod









Calibration certificates available for all sizes.

| Part No. | Range | Accuracy | Resolution | List Price | Sale Price |
|------------------|------------------|-------------------------------------|----------------|------------|------------|
| Bluetooth Comm | nunication | | | | |
| 810.1506.10 | 6"/150mm | 0.0008"/20µm | 0.0005"/0.01mm | \$483.52 | \$459.34 |
| 810.1526.10 | 8"/200mm | 0.0012"/30µm | 0.0005"/0.01mm | \$727.56 | \$691.18 |
| 810.1536.10 | 12"/300mm | 0.0012"/30µm | 0.0005"/0.01mm | \$899.43 | \$854.46 |
| Proximity Cable | Communication | | | | |
| 810.1702.10 | 6"/150mm | 0.0008"/20µm | 0.0005"/0.01mm | \$311.64 | \$296.06 |
| 810.1722.10 | 8"/200mm | 0.0012"/30µm | 0.0005"/0.01mm | \$514.45 | \$488.73 |
| 810.1732.10 | 12"/300mm | 0.0012"/30µm | 0.0005"/0.01mm | \$657.68 | \$624.80 |
| Without Data Ou | tput | | | | |
| 810.1502.10 | 6"/150mm | 0.0008"/20µm | 0.0005"/0.01mm | \$257.80 | \$244.91 |
| 810.1522.10 | 8"/200mm | 0.0012"/30µm | 0.0005"/0.01mm | \$413.62 | \$392.94 |
| 810.1532.10 | 12"/300mm | 0.0012"/30µm | 0.0005"/0.01mm | \$562.57 | \$534.44 |
| Connectivity Cal | oles/Accessories | | | | |
| 981.7132 | Sylcom Basic [| Oata Processing Softw | are | \$1,303.68 | \$1,238.50 |
| 926.6721.10 | Proximity cable | Proximity cable with USB Connection | | | \$232.66 |
| 926.6723 | Proximity cable | with Serial Connection | n | \$256.27 | \$243.46 |
| 981.7100 | USB Bluetooth | Receiver | | \$164.99 | \$156.74 |

Sylvac Ultralight IV Digital Calipers

The Sylvac Ultralight IV, new design, new features, built-in Bluetooth transmitter.



Alternative jaws available, contact the Eclipse Sales Team for more information 1-800-260-2124

| Specifications | 811.1404.10 | 811.1406.10 | 811.1410.10 | 811.1415.10 | 811.1420.10 | 811.1425.10 |
|-----------------------|----------------------------|---------------------------------------|----------------|----------------|----------------|-----------------|
| Measuring Range | 0-15"/0-400mm | 0-24"/0-600mm | 0-40"/0-1000mm | 0-60"/0-1500mm | 0-80"/0-2000mm | 0-100"/0-2500mm |
| Maximum Error | 0.0012"/30µm | 0.0016"/40µm | 0.002"/50µm | 0.0035"/90µm | 0.0048"/120µm | 0.0078"/200µm |
| Repeatability | | 0.0008" /20μm | | | 0.0012"/30µ | m |
| Measuring Force | | 5 - 10 N | | | | |
| Connection | | Bluetooth Smart/Proxi RS-232 or - USB | | | | |
| Protection Rating | | IP67 (Electronic Module) | | | | |
| Preset Max. | ±399.9995 IN / ±9999.99 mm | | | | | |
| Weight | 3.3 lbs/1.5 kg | 3.5 lbs/1.6 kg | 4.1 lbs/1.9 kg | 5 lbs/2.3 kg | 5.7 lbs/2.6 kg | 6.3 lbs/2.9 kg |

| Part No. | Range | List Price | Sale Price |
|---------------------------|---------------------------------------|------------|------------|
| 811.1404.10 | 0 - 16"/0 - 400mm | \$2,759.02 | \$2,621.07 |
| 811.1406.10 | 0 - 24"/0 - 600mm | \$3,083.27 | \$2,929.11 |
| 811.1410.10 | 0 - 40"/0 - 1000mm | \$3,685.95 | \$3,501.65 |
| 811.1415.10 | 0 - 60"/0 - 1500mm | \$5,279.72 | \$5,015.73 |
| 811.1420.10 | 0 - 80"/0 - 2000mm - special order | \$7,232.11 | \$6,870.50 |
| 811.1425.10 | 0 - 100"/0 - 2500mm - special order | \$9,151.28 | \$8,693.72 |
| Connectivity Cables/Acces | sory | | |
| 981.7132 | Sylcom Basic Data Processing Software | \$1,303.68 | \$1,238.50 |
| 926.6721.10 | Proximity USB Cable | \$244.90 | \$232.66 |
| 926.6723 | Proximity Serial Cable | \$256.27 | \$243.46 |
| 981.7100 | USB Bluetooth Receiver | \$164.99 | \$156.74 |



Sylvac Digital Indicators

Features:

- · IP54 protected against fluid and dust
- Repeatability: 2µm
- Output: Proximity/Power USB/RS232/digimatic/Wireless
- Menus customizable with free software
- Wide range of functions (MIN/MAX/DELTA, TOL, Factor, Preset. Auto Off, etc)
- Bezel rotates 270°
- Large display with LED tolerance indicators
- · Includes lug back









| Part No. | Range | Accuracy | Resolution | List Price | Sale Price |
|-------------|---------------------|--------------------|------------------|------------|------------|
| 805.5201.10 | 0 - 0.500"/12.5mm | 0.0004"/0.01mm | 0.0005"/0.01mm | \$782.56 | \$743.43 |
| 805.5301.10 | 0 - 0.500"/12.5mm | 0.00012"/0.003mm | 0.00005"/0.001mm | \$977.35 | \$928.48 |
| 805.5401.10 | 0 - 1"/25mm | 0.0004"/0.01mm | 0.0005"/0.01mm | \$938.39 | \$891.47 |
| 805.5501.10 | 0 - 1"/25mm | 0.00016"/0.004mm | 0.00005"/0.001mm | \$1,133.17 | \$1,076.51 |
| 805.5621.10 | 0 - 2"/50mm | 0.00019"/0.005mm | 0.00005"/0.001mm | \$1,559.39 | \$1,481.42 |
| 805.5641.10 | 0 - 4"/100mm | | 0.0005"/0.01mm | \$2,142.59 | \$2,035.46 |
| 805.5661.10 | 0 - 4"/100mm | | 0.00005"/0.001mm | \$2,330.50 | \$2,213.98 |
| 805.5671.10 | 0 - 6"/150mm | | 0.0005"/0.01mm | \$2,796.83 | \$2,656.99 |
| 805.5681.10 | 0 - 6"/150mm | | 0.00005"/0.001mm | \$3,119.94 | \$2,963.94 |
| Bluetooth | | | | | |
| 805.6301.10 | 0 - 0.500"/12.5mm | 0.00012"/0.003mm | 0.00005"/0.001mm | \$1,134.31 | \$1,077.59 |
| 805.6501.10 | 0 - 1"/25mm | 0.00016"/0.004mm | 0.00005"/0.001mm | \$1,348.57 | \$1,281.14 |
| Accessories | | | | | |
| 981.7132 | Sylcom Basic Data P | rocessing Software | | \$1,303.68 | \$1,238.50 |
| 981.7100 | USB Bluetooth Recei | iver | | \$164.99 | \$156.74 |

Sylvac Digital Test Indicators

Features:


- · Bluetooth connectivity to your phone or tablet
- IP65 protected against fluid and dust
- · 4 measuring modes: Min, Max, TIR and Direct
- 4 measuring resolutions 0.00005"/0.001mm or 0.0005"/0.01mm
- 1-1/2" diameter dial face rotates a full 360°
- Analog scale for reversal point indication
- Meets or exceeds DIN/ISO Standards (Maximum error on 0.00005" scale at full range: 0.0004")







12

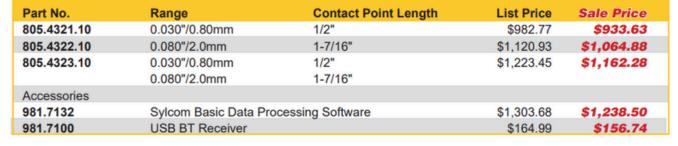

Rapid-Mic


Quick-Displacement Digital Micrometers

Fastest micrometer on the market!



- IP67 protected against fluid and dust
- Non-rotating spindle with 0.39"/10mm travel per thimble rotation
- Adjustable measuring force, 5N/10N (803.0300.10 and 803.0306.10 only)
- Menu customizable with free software
- Larger sizes and specialty anvil micrometers also available



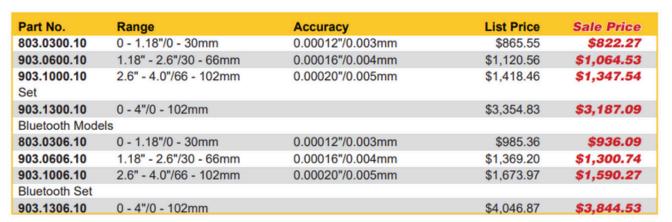

Sylvac Hi_Gage One

The perfect shop height gauge.

Features:

- Bluetooth connectivity to your phone or tablet
- Resolution: 0.0005"/0.01mm
- Repeatability: 0.0004"/10µm
- Includes scriber/measuring probe
- Accepts 8mm probes
- Preset function
- Fine adjust for easy setting
- · Scale not affected by oil, dust, chips, magnetism, shock, etc.










| Part No. | Range | Accuracy | List Price | Sale Price |
|-------------|-----------------|------------------------|------------|------------|
| 840.0406.10 | 16"/400mm | ± 0.0016" | \$2,098.43 | \$1,993.51 |
| 840.0606.10 | 24"/600mm | ± 0.002" | \$2,328.70 | \$2,212.27 |
| Accessories | | | | |
| 926.6721.10 | Proximity cable | with USB connection | \$244.90 | \$232.66 |
| 926.6723 | Proximity cable | with serial connection | \$256.27 | \$243.46 |

14

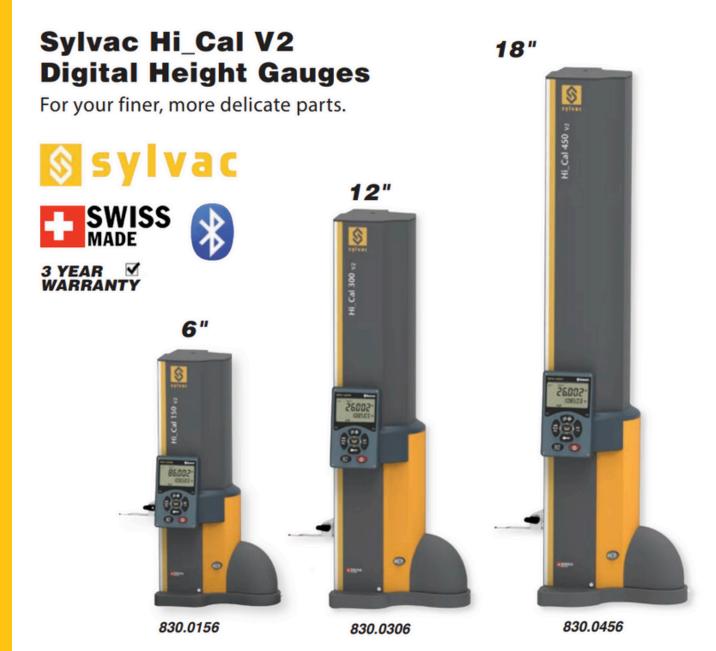

Features:

- · Bluetooth for quick, easy recorded measurements
- Extra low measuring force, from 0.2N
- Measure internal and external diameters, centerlines, heights, widths, depths and MIN/MAX/TIR capability
- Excellent repeatability thanks to the motorized carriage
- High reliability
- · Bluetooth, USB and RS232 data outputs
- Battery life: 40 hours rechargeable during operation
- Touch sensitive probe speed for easy operation
- · Base with small footprint
- Includes: protective cover, charging set, ruby ball probe Ø3mm, setting gauge and calibration certificate

Full Probe Set



930.2150

Basic Probe Set



930.2151

| Part No. | Range | Accuracy | List Price | Sale Price |
|-------------|-----------------|-------------------|------------|------------|
| 830.0156 | 6"/150mm | 0.00013"/0.0034mm | \$6,618.78 | \$6,287.84 |
| 830.0306 | 12"/300mm | 0.00016"/0.0042mm | \$7,008.12 | \$6,657.71 |
| 830.0456 | 17.5"/450mm | 0.00020"/0.005mm | \$8,176.14 | \$7,767.33 |
| Accessories | | | | |
| 930.2150 | Full Probe Set | | \$1,779.39 | \$1,690.42 |
| 930.2151 | Basic Probe Set | | \$1,187.79 | \$1,128.40 |

Sylvac Digital Indicator Testing Stand M3

Features:

- Set for the periodic calibration of analogue and digital comparators up to 2"/50 mm stroke as well as for lever indicators
- Set consisting of the M3 bench that can be used vertically or horizontally
- Bench with rapid manual movement and fine final approach
- Versatile calibration capabilities
- Precise adjustment and flexibility
- Real-time monitoring for accurate results
- Customized certificate for compliance
- Increased independence and performance









| Part No. | Range |
|-----------------------|------------------------------|
| Kit with probe and | D50S PRO |
| 809.1303 | M3 kit probe 0.4"/10mm |
| 809.1301 | M3 kit probe 1"/25mm |
| Kit with digital indi | cator |
| 809.1305 | M3 kit S_DIAL PRO M3 1"/25mm |
| 809.1304 | M3 kit S_DIAL PRO M3 2"/50mm |

Call your E.M. Precise Rep for pricing! (905) 664-2644

Sylvac Bench Table PS15 BH

Features:

- Horizontal precision bench for measuring small external dimensions
- Can be equipped with either a digital digital indicator or a Sylvac measuring probe.
- Robust cast iron construction
- 2 ergonomic levers for moving the movable axis with ball-bearing guide
- Compatible with Sylvac Ø 1.5 mm and Cary type anvils
- Supplied with hard metal measuring anvils Ø 1.5 mm
- Adjustable measuring force 0.3-1.0 N
- Measuring capacity 0.8"/20 mm, measuring range 0.4"/10 mm
- Wide choice of measuring







Part No. 808.1215

Sale \$4,185.22

List Price \$4,405.49



Perfect for measuring depths, groove widths, slot widths, recess heights, step heights and through holes.

Features:

- IP67 protected against fluid and dust
- · Bluetooth connectivity to your phone or tablet
- · 3 measuring styles available
- 4"/100mm measuring base as standard
- Optional probes available for 54-139-160 series
- Extra large display
- · Absolute measuring system



Rotary Pin Series 54-139-162-3









812.1611

812.1605

Contact our Sales Team for optional bases and contacts.

| Part No. | Description | List Price | Sale Price |
|----------|---|------------|------------|
| 812.1601 | 8"/200mm Interchangeable Anvil Bluetooth Depth Gauge | \$1,376.07 | \$1,307.27 |
| 812.1603 | 12"/300mm Interchangeable Anvil Bluetooth Depth Gauge | \$1,584.60 | \$1,505.37 |
| 812.1605 | 19"/500mm Interchangeable Anvil Bluetooth Depth Gauge | \$2,031.46 | \$1,929.89 |
| 812.1611 | 8"/200mm Standard Style Bluetooth Depth Gauge | \$1,244.31 | \$1,182.09 |
| 812.1613 | 12"/300mm Standard Style Bluetooth Depth Gauge | \$1,416.17 | \$1,345.36 |
| 812.1615 | 19"/500mm Standard Style Bluetooth Depth Gauge | \$1,945.86 | \$1,848.57 |
| 812.1621 | 8"/200mm Rotary Pin Bluetooth Depth Gauge | \$1,446.11 | \$1,373.80 |
| 812.1623 | 12"/300mm Rotary Pin Bluetooth Depth Gauge | \$1,641.66 | \$1,559.58 |
| 812.1625 | 19"/500mm Rotary Pin Bluetooth Depth Gauge | \$2,257.29 | \$2,144.43 |

Sylvac Protractor Smart

Features:

- Protractor with integrated Bluetooth® system
- Large display with colour LED tolerance status indication
- Three buttons, including the central button with selectable favourite function

Ruler length 8"/200 mm (other lengths available as an option)

Measuring range: 1 x 360°, 2 x 180°, 4 x 90°
Additional data outputs Proximity and Power

Protection class IP54





Part No. 820.1706.10

Sale \$2,779.99 List Price \$2,926.30

Sylvac Absolute Digital Measuring Probes S Probe P12D

Features:

- Measuring range 0.5"/12.7mm
- Resolution 0.1 and 0.01 micron
- · Absolute system with integrated correction, no more pairing needed
- Patented dual inductive and capacitive system
- · Ball bearing
- · Very high accuraccy and repeatability
- Direct USB output





| Part No. | Range | Accuracy | List Price | Sale Price |
|-----------------|-------------|----------|------------|------------|
| High Resolution | | | | |
| 801.1012 | 0.5"/12.7mm | 0.0006mm | \$2,345.39 | \$2,228.12 |
| 801.1018 | 0.5"/12.7mm | 0.0006mm | \$2,427.89 | \$2,306.50 |
| Standard | | | | |
| 801.2012 | 0.5"/12.7mm | 0.001mm | \$1,874.48 | \$1,780.76 |
| 801.2017 | 0.5"/12.7mm | 0.001mm | \$1,915.73 | \$1,819.94 |

Digital displays available for P12D probes!



Simplify Your Quality Control With Sylvac SYLCOM




Sylcom is a data acquisition software that allows you to easily acquire and analyze your manufacturing data, keep your parts compliant and increase the efficiency of your production.

A great alternative to a costly QMS.

Simplify Data Transmission With Sylvac Vmux2

Vmux is a virtual multiplexer enabling operators to send production data quickly and easily to third-party software. The virtual multiplexer Vmux2, specially designed for Windows computers, facilitates the connection of all types of Sylvac instruments (USB, Bluetooth®) and the transfer of data to third-party software (QM/QC, CSV, etc.).

It replaces traditional multiplexers.

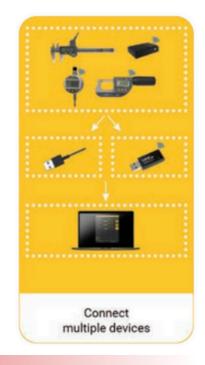

Call your E.M. Precise Rep for more information! (905) 664-2644

18

Sylvac SCAN S145L-P With Renishaw SP25M 3D Probe

Complete measurement with a single system!

GAME CHANGER!

NOW AVAILABLE WITH 3D PROBE: the addition of the Renishaw SP25M probe offers a multi-sensor solution for characteristics not visible with optics.



Part No. 54-167-050-0

Features:

- Seamless integration with combined sensor measurements
- Easy programming thanks to user-friendly functions
- Full touch probe scanning capability for measuring form
- Interchangeable probe stylus increased access
- Automated probe qualification routine
- Full part measurement in just a few seconds
- Measuring range: 5.7"/145mm diameter, 50.3"/1280mm length
- Reduce inspection time & scrap, increase productivity
- High resolution and high accuracy
- Typical measurements include: hole and slot size, location and form, roundness, radial and axial runout

The BEST Solution for Measuring Shafts and Turned Parts!

Instant results with one click of a button and no operator influence!

Increase productivity while reducing scrap and inspection cycle times by a factor of 10 with the SCAN family line-up.

















Trimos 3D Measuring Arms



| Part No. | Range | Axes |
|----------|-------------|------|
| A3 | | |
| A3-1300 | 4.3ft/1.3m | 6 |
| A3-1800 | 5.9ft/1.8m | 6 |
| A5 | | |
| A5-1800 | 5.9ft/1.8m | 6 |
| A5-2500 | 8.2ft/2.5m | 6 |
| A5-3200 | 10.5ft/3.2m | 6 |
| A5-4000 | 13.1ft/4.0m | 6 |
| A5-5000 | 16.4ft/5.0m | 6 |
| A5-7000 | 23.0ft/7.0m | 6 |
| A5-9000 | 29.5ft/9.0m | 6 |
| A6 | | |
| A6-1800 | 5.9ft/1.8m | 7 |
| A6-2500 | 8.2ft/2.5m | 7 |
| A6-3200 | 10.5ft/3.2m | 7 |
| A6-4000 | 13.1ft/4.0m | 7 |
| A6-5000 | 16.4ft/5.0m | 7 |
| A6-7000 | 23.0ft/7.0m | 7 |
| A6-9000 | 29.5ft/9.0m | 7 |

Accessories Available









Plus More

Trimos V Series Digital Height Gauges

The Trimos V series vertical measuring instruments have been developed for the most difficult shop floor environments. Manufactured in Switzerland, they guarantee precise and repeatable measurements with superior ease of use.

Features:

- Electronically adjustable measuring force 0.75/1.5 (N)
- · Lithium-ion rechargeable batteries last up to 40 hours
- · Bluetooth transmitter available

All models Include:

- · Charging unit
- Measuring probe with ruby ball Ø4mm
- · Probe holder elbow Ø 8mm
- Setting guage
- · User's manual and test certificate





V-Series Electronic Height Gauges Comparison Chart

| | V9 | V8 | V7 | V6 | V5 | V4 | V3/V2 |
|---------------------|--------------|----------|----------|----------|----------|----------|----------|
| Accuracy | | | | | | | |
| 1.2 + L(mm)/1000 μm | \checkmark | / | | | | | |
| 2 + L(mm)/400 μm | | | √ | √ | | | |
| 2.5 + L(mm)/300 μm | | | | | √ | | |
| 4.5 - 6 μm | | | | | | √ | |
| 7 - 8 μm | | | | | | | √ |
| Range | | | | | | | |
| 400/700mm | \checkmark | / | / | / | √ | / | ✓ |
| 1100mm | \checkmark | √ | / | / | √ | | |
| Smart Reverse for Ø | \checkmark | / | / | / | √ | √ | ✓ |
| Air Cushion | √ | √ | / | / | √ | √ | |
| Wireless Option | √ | / | / | / | √ | ✓ | |
| Manual/Motorized | \checkmark | | / | / | √ | | |
| Manual ONLY | | V | | | | √ | ✓ |
| Fine Adjustment | | / | | | | | |
| Color Display | \checkmark | | / | | | | |
| 2D Measuring | √ | | √ | | | | |

| Part No. | Range | List Price | Salle Prilee |
|----------------------|---|------------|------------------|
| V2 | | | |
| V2-400 | 16"/407mm | \$5,940.00 | \$5,643.00 |
| V2-700 | 28"/711mm | \$7,038.04 | \$6,686.14 |
| V3 | | | |
| V3-400 | 16"/407mm | \$6,585.89 | \$6,256.60 |
| V3-700 | 28"/711mm | \$7,298.56 | \$6,933.63 |
| V4 | | | |
| V4-400 | 16"/407mm | \$8,155.61 | \$7,747.83 |
| V4-700 | 28"/711mm | \$9,401.05 | \$8,931.00 |
| V5 | | | |
| V5-400 | 16"/407mm | \$9,401.05 | \$8,931.00 |
| V5-700 | 28"/711mm | | Call for pricing |
| V5-1100 | 43.7"/1110mm | | Call for pricing |
| V6 | | | |
| V6-400 | 16"/407mm | | Call for pricing |
| V6-700 | 28"/711mm | | Call for pricing |
| V6-1100 | 43.7"/1110mm | | Call for pricing |
| V7 | | | |
| V7-400 | 16"/407mm | | Call for pricing |
| V7-700 | 28"/711mm | | Call for pricing |
| V7-1100 | 44"/1100mm | | Call for pricing |
| V8 - Fine Adjustment | | | |
| V8-400 | 16"/407mm | | Call for pricing |
| V8-700 | 28"/710mm | | Call for pricing |
| V8-1100 | 43"/1109mm | | Call for pricing |
| V9 | | | |
| V9-400 | 16"/407mm | | Call for pricing |
| V9-700 | 28"/710mm | | Call for pricing |
| V9-1100 | 43"/1109mm | | Call for pricing |
| Probe Sets | | | |
| TA-SE-105 | 4mm Probe Set, 21 piece | \$2,960.19 | \$2,812.18 |
| TA-SE-106 | 8mm Probe Set, 16 piece | \$2,206.21 | \$2,095.90 |
| TA-SE-107 | 8mm Basic Probe Set, 7 piece | \$854.26 | \$811.55 |
| Accessories | | | |
| TA-IH-127 | 12"/300mm Holder - for 8mm probes | \$1,697.23 | \$1,612.37 |
| TA-EL-022 | Bluetooth transmitter (Not available for V3 models) | \$1,007.73 | \$957.34 |
| 981.7161.10 | Vmux software - for connecting multiple units to one PC | \$635.13 | \$603.37 |



22

Trimos Height Gauges V1 & V1+

Tough gauges for the modern workshop!



Features:

- · Robust and Easily Portable
- · Clear, Simple User Interface
- · Counterweight for Operational Comfort
- Quick and Smooth Carriage movement
- Designed and manufactured in Switzerland
- Bidirectional Measurement Capability (V1+)
 Management (V1+)
- Measuring Force Management (V1+)
- Available in 300 and 600 mm models



NEW

| Part No. | Range | List Price | Salle Prilee |
|----------|-----------|------------|--------------|
| V1 | | | |
| V1-300 | 12"/306mm | \$4,134.70 | \$3,927.97 |
| V1-600 | 24"/611mm | \$4,421.83 | \$4,200.74 |
| V1+ | | | |
| V1+-300 | 12"/306mm | \$5,798.39 | \$5,508.47 |
| V1+-600 | 24"/611mm | \$5,914.92 | \$5,619.17 |


Trimos Height Gauge V4+

The new standard in height gauge performance

Features:

- Offers robust mechanical stability; supports long and heavy probes with exceptional repeatability
- · Ease of use for both simple and complex tasks
- Real time display of measurement progress and results
- · Smart touch navigation
- Integrated 2-coordinate measurement
- · Comprehensive data connectivity
- · Available in 300 and 600 mm models
- 2D







Trimos Setting Bench Alesta

Motorized setting bench for the control and calibration of measuring means with fixed and variable dimensions

Features:

- Ideal for use in the workshop area Everyone has cylinder bore gauges!
- Very simple manipulation
- Motorized carriage movement
- · For inside, outside, 2 and 3 points instruments
- No need to buy and recalibrate gage blocks and rings
- Inhouse calibration of instruments
- Time for setting operation reduced by 90%
- Connectivity and interface via USB and Ethernet
- Adapters of ALESTA version compatible





Call your E.M. Precise Rep for more information! (905) 664-2644

Trimos Portable CMM - C4

The world's first truly portable CNC Coordinate Measuring

Machines designed for the workshop

Features:

- · Portable for the maximum of flexibility
- 4 axes model
- · High precision using Renishaw TP20 probe
- Small foot print
- Fully CNC combined with manual operation
- · Ease of use with Aberlink software
- 3D complement to the height gauge 1D/2D
- Designed for workshop operation
- Ethernet or wireless communication
- Extremely easy to set up





25% OFF all models!

Trimos HC-Line

New generation of calibration instruments

Features:

- Ideal for use in laboratory and workshop
- · New ergonomic concept
- Measuring carriage with fine adjustment
- Large range of accessories
- Adjustable measuring force (except HC3)
- Modular design
- · Direct measurement over the whole range













Calibration of threaded

ring gauges













Calibrate gauges on-site!







Comparative control

of gauge blocks 100 /

250mm

Call your E.M. Precise Rep for more information! (905) 664-2644

Trimos Measuring and Setting Bench HS4, HS5, HS6

Features:

- Delivered with two parallel 25 mm TEL5 gauge blocks (HS4, HS5)
- · Robust design, ideal for use in workshop
- Very simple use
- Fast and precise checking
- · Works on battery or power supply





Set your own

instruments quickly

and accurately!


Call your E.M. Precise Rep for more information! (905) 664-2644

Trimos Measuring Bench TELS

Simple and robust instrument for small dimensions measuring. Ideal for bar turning workshops

Features:

- · Ideal for checking small dimensions
- Easy manipulation
- Suitable for use in workshop area
- Wide range of accessories

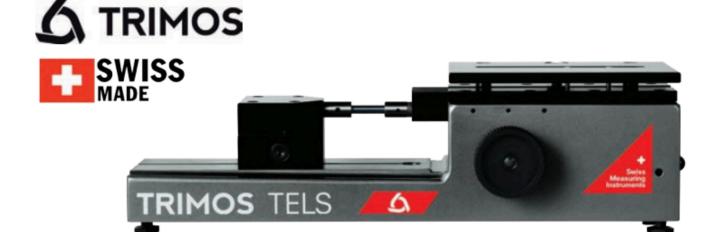

Call your E.M. Precise Rep for more information! (905) 664-2644



Moore & Wright Surface Roughness Tester

Features:

- Bright LCD display for wide angle viewing
- · Digital signal processing for high accuracy measurement
- Selectable measuring parameters, sample distance and units
- Internal storage of 500 data points
- Data export to PC, analysis and reporting by dedicated software
- Aluminium housing for high durability and protection from electromagnetic interference

Part No. MWT-1100



Moore & Wright Leeb Hardness Tester

Features:

- Can be used on steel and cast steel, alloy tool steel, grey cast iron, ductile iron, cast aluminium alloy, copper zinc alloy (brass), copper tin alloy (bronze), pure copper
- Equivalent values from 6 additional hardness standards displayed simultaneously on screen
- Colour screen LCD with adjustable brightness
- Leeb hardness shock wave display for additional diagnostics
- Compact & portable
- · Suitable for harsh operating environments
- Anti-vibration, impact and electromagnetic interference
- · High-performance ARM processor & digital signal processing for fast accurate readingsgital signal processing for high accuracy measurement

Part No. MWT-3100





NEW

NEW



NEW

Moore & Wright Digital Ultrasonic Thickness Gauge

Features:

- Use of ultrasound to determine material thickness
- · High accuracy measurement over a wide range
- Three measuring modes, P-E, I-E, Test
- IE mode can pass through 500 µm coating
- Accuracy (mm) = H<10 ±0.05, H≥10 ±0.04 + 0.5%H
- Suitable for measuring steel, iron, glass, plastic, aluminium, etc.
- Fully configurable test parameters
- Metric or imperial, selectable resolution of 0.1 or 0.01mm

Part No. MWT-2500





NEW

NEW!

92.6

27

Moore & Wright Coating ThicknessGauge

Non-Ferrous

Features:

- · Graphic LCD with backlight
- · Compact size with integrated probe
- Eddy current method (ISO 2360, ASTM D7091, ASTM B244) enables measurement of non-conductive coating on non-magnetic metal collectives
- Data memory up to 500 readings
- Ready to measure immediately without calibration
- Easy to perform zero-point correction

Part No. MWT-2105





Moore & Wright Coating Thickness Gauge Ferrous

Features:

- · Graphic LCD with backlight
- Compact size with integrated probe.
- Magnetic induction method (ISO 2178, ASTM D7091, ASTM B499), measurement of non-magnetic coatings on magnetic substrates
- · Data memory up to 500 readings
- · Ready to measure immediately without calibration
- · Easy-to-perform zero-point correction

Part No. MWT-2100



List Price \$782.74

Moore & Wright Digital Force Gauge

Features:

- User friendly touch keypad & full-format 160x128 dot matrix LCD (2.8 inch) backlit display with display update rate of 10 times per
- Accuracy = +/- 0.2% F.S.
- Overload capacity = 150% of F.S. (LCD blinks beyond 110%)
- · Compact and durable metal housing
- · Selectable units of N, gf, kgf, ozf, and lbf
- Supplied with a selection of measuring heads
- · Easily mountable to an external frame



| Part No. | Range | Resolution | List Price | Sale Price |
|----------|---------|------------|------------|------------|
| MWT-8130 | 0-100N | 0.01N | \$766.69 | \$690.02 |
| MWT-8140 | 0-200N | 0.05N | \$766.69 | \$690.02 |
| MWT-8150 | 0-500N | 0.05N | \$802.35 | \$722.12 |
| MWT-8160 | 0-1000N | 0.10N | \$713.20 | \$641.88 |

e & Wright

Moore & Wright Traditional External Micrometer, 966 Series

Features:

- Tungsten carbide measuring faces
- Blue textured frame finish
- Locking lever
- Adjusting key
- Supplied in case
- Choice of standard or vernier type sleeve
- · Supplied with setting standard





| Part No. | Range | List Price | Sale Price |
|----------|-------|------------|------------|
| 19662 | 1-2" | \$89.55 | \$80.60 |
| 19663 | 2-3" | \$97.34 | \$87.61 |
| 19664 | 3-4" | \$109.02 | \$98.12 |
| 19665 | 4-5" | \$125.89 | \$113.30 |
| 19666 | 5-6" | \$149.25 | \$134.33 |

Moore & Wright External Micrometer, 200 Series

Features:

- Hammertone finish frame with insulated grip
- Tapered for easier access to difficult areas
- · Constant force ratchet on thimble
- Locking lever
- Adjusting key
- · Supplied in case with setting standard



| Part No. | Range | Resolution | List Price | Sale Price |
|-----------|-------|------------|------------|------------|
| MW200-01I | 0-1" | 0.0005" | \$82.26 | \$74.03 |
| MW200-02I | 1-2" | 0.0005" | \$87.62 | \$78.86 |
| MW200-03I | 2-3" | 0.0005" | \$94.77 | \$85.29 |
| MW200-04I | 3-4" | 0.0005" | \$103.72 | \$93.35 |

Moore & Wright Workshop External Micrometer Set, 215 Series

Features:

- Satin-chrome forged steel frame with insulated grip
- Constant force ratchet on thimble
- · Adjusting key
- Supplied with setting standards
- Supplied in wooden box





| Part No. | Range | Resolution | List Price | Sale Price |
|-------------|-------|------------|------------|------------|
| MW215-01BLI | 0-3" | 0.001" | \$259.31 | \$233.38 |
| MW215-02BLI | 0-4" | 0.001" | \$369.87 | \$332.88 |
| MW215-03BLI | 0-6" | 0.001" | \$670.62 | \$603.56 |
| MW215-04BLI | 0-8" | 0.001" | \$1,064.07 | \$957.66 |



28

Carbide Super Scriber



• Lightweight • Retractable carbide tip • Knurled grip • Machined aluminum body • Pocket clip

| Part No. | Description | Overall Length | List Price | Sale Price |
|--------------|-----------------------|----------------|------------|------------|
| 52-500-050-0 | Carbide Super Scriber | 6.5" | \$67.55 | \$64.17 |
| 52-500-055-0 | Carbide Refill | | \$19.64 | \$18.66 |



2 each @:

• Dimensions: 1-1/2" L x 1-1/4" W x 1-1/4" H

Work capacity: Approximately 1"

2 each @:

• Dimensions: 2" L x 1-1/2" W x 1-1/2" H

Work capacity: 1-1/2"

All feature:

- Surfaces are square and parallel within 0.0005"
- V-grooves are square and parallel with all surfaces within 0.0005"
- · Corresponding dimensions for each pair are alike within 0.0005"

Part No. 52-475-500-0



List Price 276.55

V-Block Set



Features:

- Hardened steel. All sides of V-Blocks precision ground parallel and square within 0.0004"
- Height: 2", Length:, 2-3/4", Width: 2"
- Two clamps, with screw hole at 90 degrees for positive clamping of work, are included
- Clamping capacity= 2"/50m
- V-Blocks are constructed with stepped grooves which allow the clamps to be inserted without protrusion, thus allowing V-Blocks to be used on base, ends or sides
- Matched pair of V-Blocks are perfectly aligned with 90 degree V-grooves ground central and parallel to the sides and bases

Part No. 52-475-555-0



List Price \$453.39





Horizontal & Vertical Test Indicators

Features:

- · Super smooth jeweled movement
- · Smooth bezel adjustment for easy zero setting
- · Solid brass anti-magnetic housing
- 0.080" and 0.120" carbide ball contact points (0.040" steel ball)
- 0.060" range with auto reverse and rev. counter
- · Easy to read tilted dial









52-562-005-0

52-562-001-0

52-562-002-BD

| Part No. | Graduation | Dial Size | Dial Reading | List Price | Sale Price |
|--------------|------------|-----------|--------------|------------|------------|
| Horizontal | | | | | |
| 52-562-001-0 | 0.0005" | 1-1/2" | 0 - 15 - 0 | \$341.39 | \$324.32 |
| 52-562-002-0 | 0.0005" | 1" | 0 - 15 - 0 | \$261.27 | \$248.21 |
| Vertical | | | | | |
| 52-562-005-0 | 0.0005" | 1" | 0 - 15 - 0 | \$258.19 | \$245.28 |

Weight & Counting Scale



- Accurately measures weights and quantities
- Use for counting large batches of small parts
- Measure weights up to 66 lbs./30 kg.
- · Removable stainless steel weighing pan and durable ABS housing
- Converts pounds, ounces, grams, kilograms
- Internal battery with 100 hours of use
- Front panel leveling indicator with adjustable leveling feet
- 3 panel backlit LCD display indicates weight, average piece weight and count

Measures up to 66 lbs.!

Part No. 54-750-030-0



List Price \$351.65




30

1-2-3 & 2-4-6 Blocks

Useful in layout and grinding work.

Features:

- 23 holes for easy clamping
- · Sold in pairs
- · Hardened 56 60 HRC
- 1-2-3 blocks have 5 threaded holes, 3/8" - 16
- 2-4-6 blocks have 5 threaded holes. 5/8" - 11

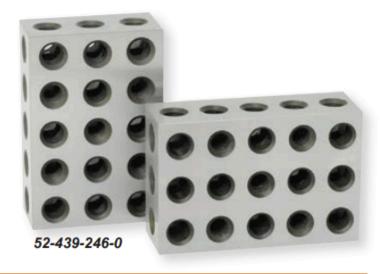

| Part No. | Description | Accuracy | List Price | Sale Price |
|--------------|--------------|--------------|------------|------------|
| 52-439-031-0 | 1-2-3 Blocks | ± 0.0002"/1" | \$84.58 | \$80.35 |
| 52-439-246-0 | 2-4-6 Blocks | ± 0.0003"/1" | \$321.96 | \$305.86 |





Features:

- Supplied with zero reference setting block
- IP65 protected against fluid and dust
- 4 magnets embedded into base
- · 2" default setting height
- Steel contact surface with 0.0002" flatness
- Resolution: 0.00005"/0.001mm
- Repeatability: 0.00015"/0.004mm
- Accuracy: 0.0001"/0.003mm
- Includes a rugged, aluminum fitted case



Part No. 54-188-200-0

List Price \$251.76

The mini-MAG Protractor provides instant 360° digital inclination display of any angle.

Features:

 Accuracy: ± 0.2° Resolution: 0.05° Repeatability: 0.05° Measuring range: 360°

Embedded magnets

Display automatically inverts

Dimensions: 2.375" x 1.375" x 2.375"

· Hold feature

· Battery Life: up to 250 hrs.



Display inverts for easy reading!




Part No. 54-422-450-1



List Price \$217.54

Bore Gauge Setting Master Kits - Inch & Metric

Fowler's Bore Gauge Setting Master Kit is used for accurately setting any bore gauge up to 6"/150mm in diameter to an accuracy of 0.0001"/0.003mm

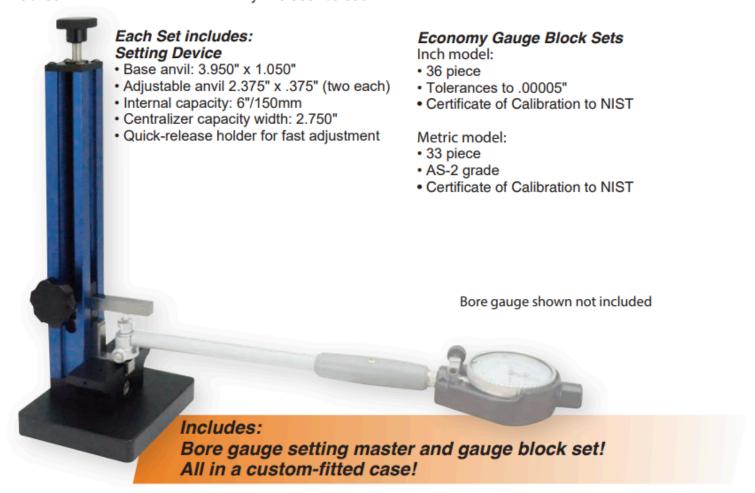

| Part No. | Description | List Price | Sale Price |
|--------------|--|------------|------------|
| 53-646-000-1 | Inch Bore Gauge Setting Master Kit | \$652.16 | \$619.55 |
| 53-646-010-0 | Metric Bore Gauge Setting Master Kit | \$663.64 | \$630.46 |
| 53-646-005-0 | Bore Gauge Setting Master Kit - without Gauge Blocks | \$403.54 | \$383.36 |

32

Prices & Specifications are subject to change without notice.



Get in touch with your E.M. Precise Rep for more details and order now.

Email info@emprecise.com | Call (905) 664-2644 | Visit us online at www.emprecise.com